


1	2	3	4	5	6	CUSTOMER DRAWING
REV	ECN NO	DESCRIPTION	DATE	APPROVED		
A	-	NEW RELEASED	2019.09.01	CINDY.LI		

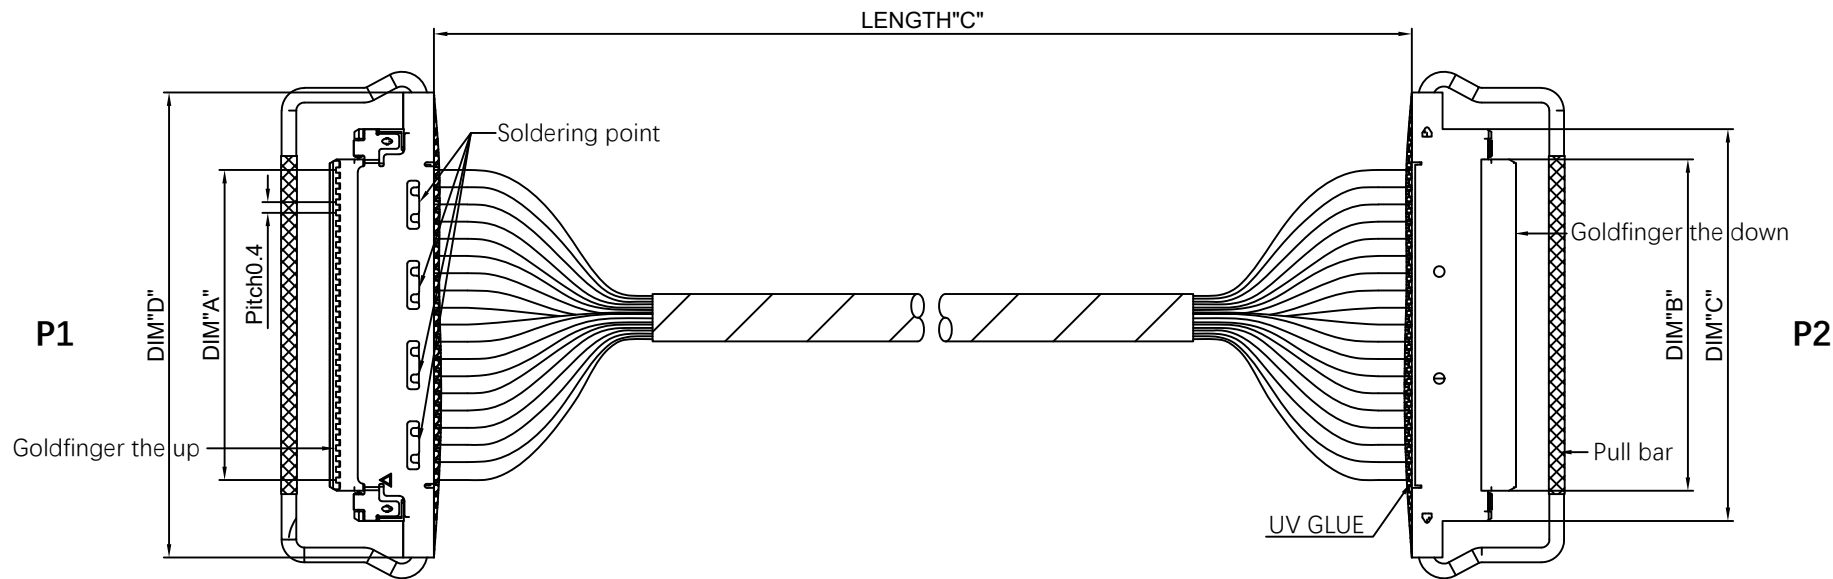

Specifications :

Voltage rating: 30V AC / DC.

Current rating: 0.1~0.8A AC / DC.

Withstanding voltage: 250V AC/minute.

Temperature range: - 25°C ~ + 80°C.

Insulation resistance: ≥ 50MΩ.

Contact resistance: 36AWG 275mΩ MAX.

38AWG 360mΩ MAX.

40AWG 600mΩ MAX.

42AWG 700mΩ MAX.

44AWG 1080mΩ MAX.

Applicable wires(AWG or mm²): 36AWG ~ 44AWG.

Circuits	Dimensions			
	A	B	C	D
10P	3.60	4.40	6.66	9.40
12P	4.40	5.20	7.46	10.20
20P	7.60	8.40	10.66	13.40
30P	11.60	12.40	14.66	17.40
40P	15.60	16.40	18.66	21.40
50P	19.60	20.40	22.66	25.40
60P	23.60	24.40	26.66	29.40



UNMARKED TOLERANCES		TITLE		2009		KIMKEE.LTD		www.kimkee.cn	
DIMENSIONS	TOLERANCE	I-PEX 20633-030T-01 PITCH0.4mm		45Ω MICRO-COAXIAL CABLE BLUE					
x	±0.5	CUSTOMER		CUSTOMER PART NO.					
x.x	±0.25	DRAWN BY		PART NUMBER					
x.xx	±0.15	CHECKED BY		DRAWING NUMBER					
0 to 500	+15 / -0	APPROVED BY		SCALE FREE		ALL DIMENSION UNIT IN MM		SHEET 1 OF 1	
> 501	+3W/-0 of length								
ANGLES									
x°	±1°								

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

A

B

C

D

E

F