


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN NO	DESCRIPTION	DATE	APPROVED	1	2	3	4	5	6	CUSTOMER DRAWING
A	-	NEW RELEASED	2019.09.01	CINDY.LI							

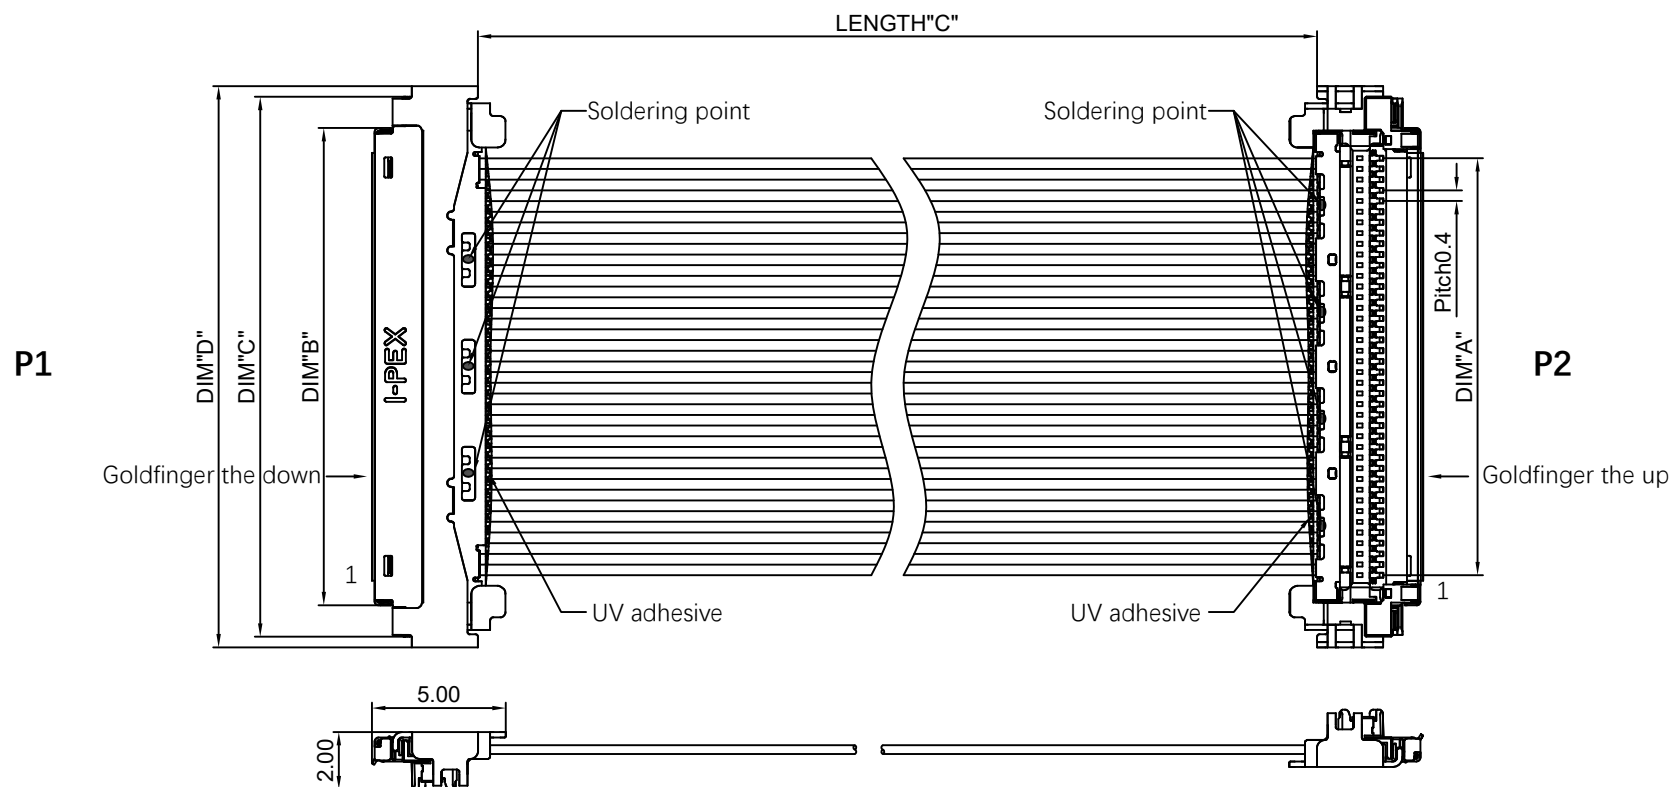

Specifications :

Voltage rating: 100V AC / DC.

Current rating: 0.15~1.0A AC / DC.

Withstanding voltage: 500V AC/minute.

Temperature range: - 40°C ~ + 105°C.

Insulation resistance: ≥ 1000MΩ.

Contact resistance: 34AWG 180mΩ MAX.

36AWG 275mΩ MAX.

38AWG 360mΩ MAX.

40AWG 600mΩ MAX.

42AWG 700mΩ MAX.

44AWG 1080mΩ MAX.

Applicable wires(AWG or mm²): 34AWG ~ 44AWG.

Circuits	Dimensions			
	A	B	C	D
30P	11.60	13.85	16.20	17.00
40P	15.60	17.85	20.20	21.00
50P	19.60	21.85	24.20	25.00
60P	23.60	25.85	28.20	29.00
70P	27.60	29.85	32.20	33.00



UNMARKED TOLERANCES		TITLE		2009		KIMKEE.LTD		www.kimkee.cn	
DIMENSIONS	TOLERANCE	I-PEX 20878-040T-01 PITCH0.4mm LVDS HARNESS							
x	±0.5	CUSTOMER		CUSTOMER PART NO.					
x.x	±0.25	DRAWN BY		PART NUMBER					
x.xx	±0.15	CHECKED BY		DRAWING NUMBER					
0 to 500	+15 / -0	APPROVED BY		SCALE FREE		ALL DIMENSION UNIT IN MM		SHEET 1 OF 1	
> 501	+3W/-0 of length								
ANGLES									
x°	±1°								

0 10 20 30 40 50 60 70 80 90 100