REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2020.05.08	CINDY.LI

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



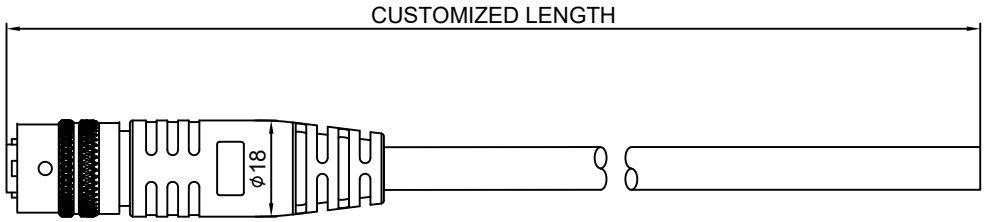

1. MIL-DTL-26482 Circular Connector with Cable Connecting Overmolded.
2. Waterproof Rate: IP67, Immersed in 1M Water For 30 Minutes.

Connector material:
Contact: Copper Alloy, Gold plating
Insulation: Neoprene, Black
Shell: Aluminum, Chrome plating, Passivation

Technical specifications:
Voltage range: 600V AC/DC
Current range: 7.5A
Temperature range: -55°C~+125°C

Cable specifications:
Cable: UL Style Cable PVC / PUR
Minimum bending radius:
Fixed installation: 8x Cable OD
Flexible installation: 10x Cable OD

UNMARKED TOLERANCES	
DIMENSIONS	TOLERANCE
x.	±0.5
x.x	±0.25
x.xx	±0.15
0 to 500	+15 / -0
> 501	+3%/-0 of length
ANGLES	
x°	±1°

TITLE
Circular Connector MIL-DTL-26482 PT06E-8-4S Pre-Molding Cable Assembly

KIMKEE.LTD 2009 www.kimkee.cn

CUSTOMER	-	CUSTOMER PART NO.	-		
DRAWN BY	CINDY.LI	PART NUMBER	PT06E-8-4S	SIZE A3	REV A
CHECKED BY	CLARA.TANG	DRAWING NUMBER	MS3116E8-4S		
APPROVED BY	HUAHUA.HE	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	

KIMKEE.LTD ISSUED PDF Format D.C 2015/863/EU www.kimkee.cn