
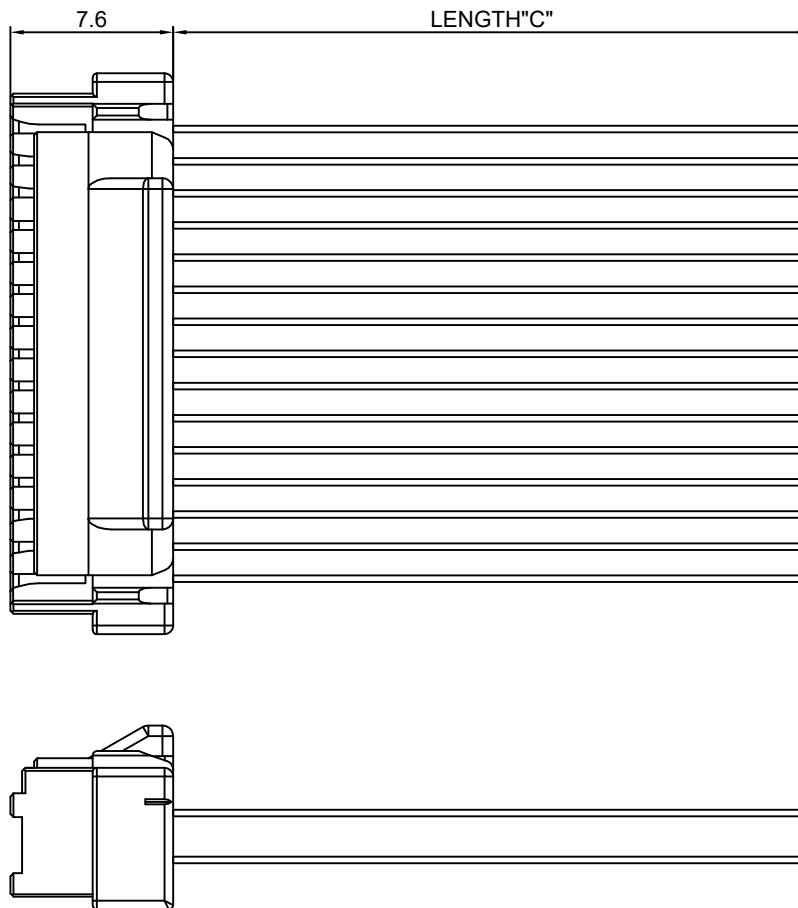


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2019.09.01	CINDY.LI

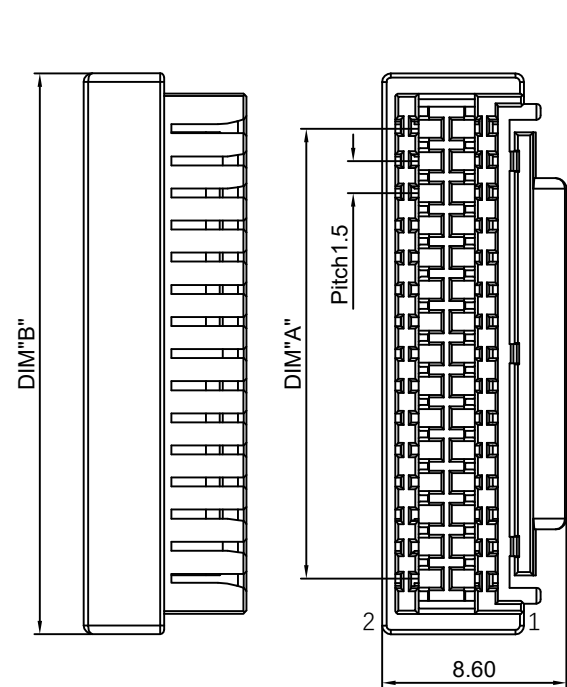

Specifications :

Voltage rating: 100V AC / DC.

Current rating: 2A AC / DC.

Withstanding voltage: 500V AC/minute.

Temperature range: - 25°C ~ + 85°C.

Insulation resistance: ≥ 500MΩ.

Contact resistance: ≤ 30mΩ.

Matching contact: SZPD-002T-P0.3.

Applicable wires(AWG or mm²): 24AWG ~ 28AWG.

Circuits	Dimensions	
	A	B
2*5P	6.00	11.20
2*6P	7.50	12.70
2*7P	9.00	14.20
2*8P	10.50	15.70
2*9P	12.00	17.20
2*10P	13.50	18.70
2*11P	15.00	20.20
2*12P	16.50	21.70
2*13P	18.00	23.20
2*14P	19.50	24.70
2*15P	21.00	26.20
2*16P	22.50	27.70
2*17P	24.00	29.20
2*18P	25.50	30.70
2*19P	27.00	32.20
2*20P	28.50	33.70

UNMARKED TOLERANCES		TITLE		2009		KIMKEE.LTD		www.kimkee.cn	
DIMENSIONS	TOLERANCE								
x	±0.5	Pitch1.5mm DOUBLE ROW HOUSING WIRING HARNESS		CUSTOMER		CUSTOMER PART NO.		-	
x.x	±0.25								
x.xx	±0.15	DRAWN BY		PART NUMBER		ZPDR-XXV-S		SIZE	
0 to 500	+15 / -0	CHECKED BY		DRAWING NUMBER		ZPDR		A3	
> 501	+3W/-0 of length	APPROVED BY		SCALE FREE		ALL DIMENSION UNIT IN MM		REV	
ANGLES		HUAHUA.HE						A	
x°	±1°							SHEET 1 OF 1	

