


REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2019.09.01	CINDY.LI

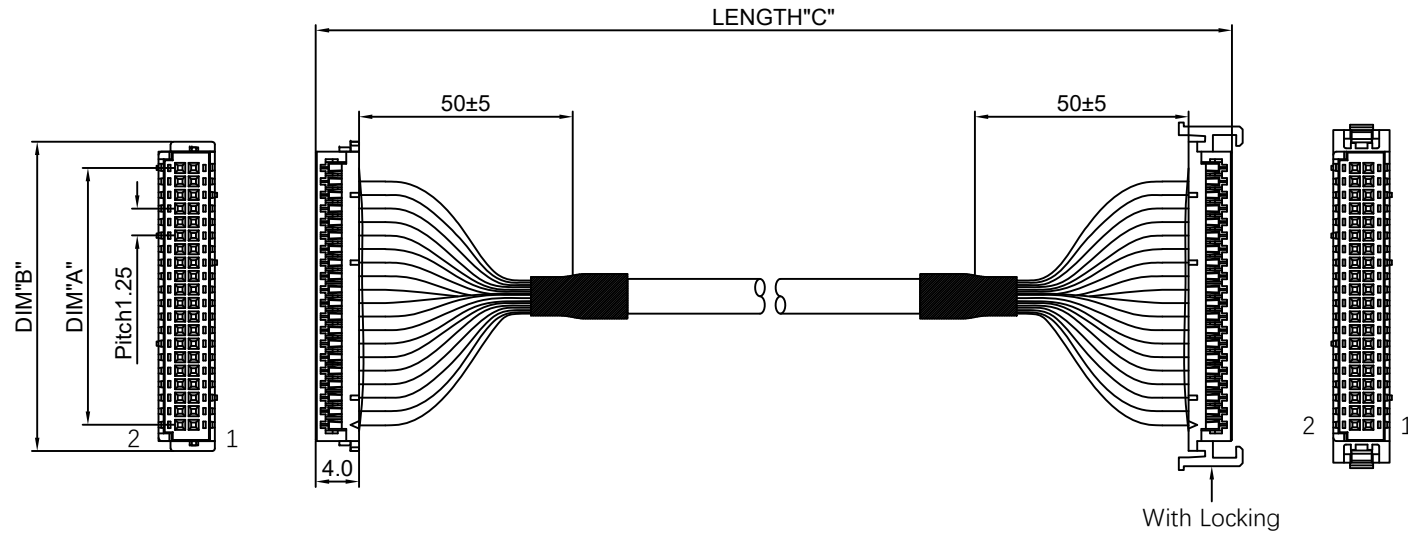

Specifications :

Voltage rating: 150V AC / DC.

Current rating: 1A AC / DC.

Withstanding voltage: 500V AC/minute.

Temperature range: - 25°C ~ + 85°C.

Insulation resistance: ≥ 500MΩ.

Contact resistance: ≤ 20mΩ.

Matching contact: DF13-2630SCF.

Applicable wires(AWG or mm²): 26AWG ~ 30AWG.

Circuits	Dimensions	
	A	B
2*5P	5.00	10.40
2*6P	6.25	11.65
2*7P	7.50	12.90
2*8P	8.75	14.15
2*9P	10.00	15.40
2*10P	11.25	16.65
2*11P	12.50	17.60
2*12P	13.75	19.15
2*13P	15.00	20.40
2*14P	16.25	21.65
2*15P	17.50	22.90
2*16P	18.75	24.15
2*17P	20.00	25.40
2*18P	21.25	26.65
2*19P	22.50	27.90
2*20P	23.75	29.15
2*25P	30.00	35.40

UNMARKED TOLERANCES		TITLE		2009		KIMKEE.LTD		www.kimkee.cn	
DIMENSIONS	TOLERANCE	Pitch 1.25mm DOUBLE ROW HOUSING WIRING HARNESS							
x	±0.5	CUSTOMER		-		CUSTOMER PART NO.		-	
x.x	±0.25	DRAWN BY		CINDY.LI		PART NUMBER		DF13-xxDS-1.25C	
x.xx	±0.15	CHECKED BY		CLARA.TANG		DRAWING NUMBER		DF13	
0 to 500	+15 / -0	APPROVED BY		HUAHUA.HE		SCALE FREE		ALL DIMENSION UNIT IN MM	
> 501	+3W/-0 of length							SHEET 1 OF 1	
ANGLES									
x°	±1°								

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

A

B

C

D

E

F