
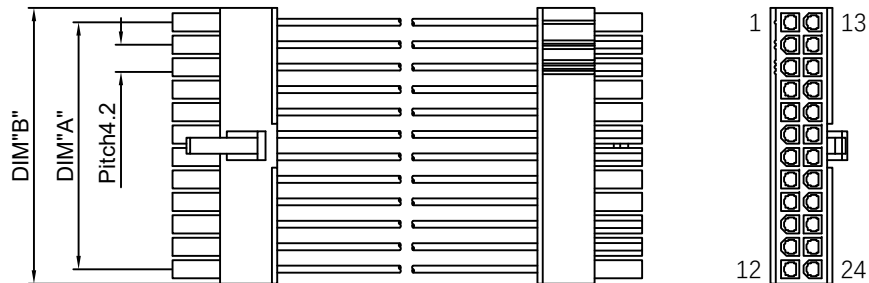


REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2019.09.01	CINDY.LI

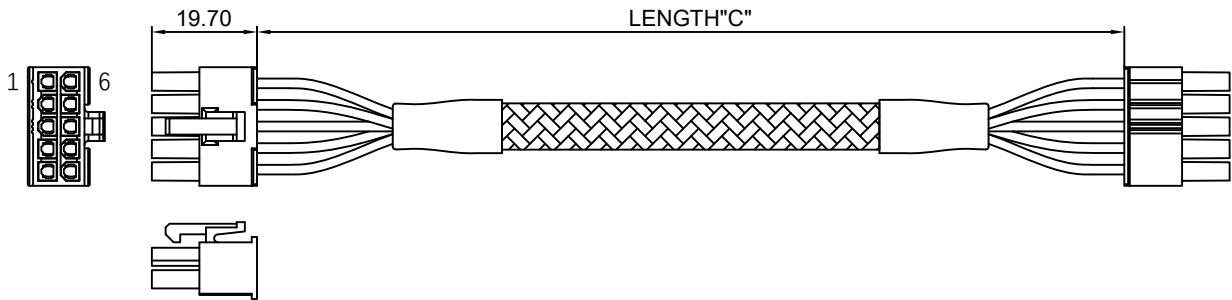

Circuits	Dimensions	
	A	B
2*1P	-	5.50
2*2P	4.20	9.70
2*3P	8.40	13.90
2*4P	12.60	18.10
2*5P	16.80	22.30
2*6P	21.00	26.50
2*7P	25.20	30.70
2*8P	29.40	34.90
2*9P	33.60	39.10
2*10P	37.80	43.30
2*11P	42.00	47.50
2*12P	46.20	51.70

Specifications :

Voltage rating: 600V AC / DC.

Current rating: 9A AC / DC.

Withstanding voltage: 1500V AC/minute.

Temperature range: - 25°C ~ + 85°C.

Insulation resistance: ≥ 1000MΩ.

Contact resistance: ≤ 10mΩ.

Matching contact: 39000038 / 39000077.

Applicable wires(AWG or mm²): 16AWG ~ 24AWG.

UNMARKED TOLERANCES		TITLE		2009		KIMKEE.LTD		2009		www.kimkee.cn	
DIMENSIONS	TOLERANCE	Pitch4.2mm DOUBLE ROW HOUSING WIRING HARNESS									
x	±0.5	CUSTOMER		-		CUSTOMER PART NO.		-			
x.x	±0.25	DRAWN BY		CINDY.LI		PART NUMBER		MOLEX 39039242		SIZE	
x.xx	±0.15	CHECKED BY		CLARA.TANG		DRAWING NUMBER		mx3903		A3	
0 to 500	+15 / -0	APPROVED BY		HUAHUA.HE		SCALE FREE		ALL DIMENSION UNIT IN MM		SHEET 1 OF 1	
> 501	+3W/-0 of length										
ANGLES											
x°	±1°										

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

