


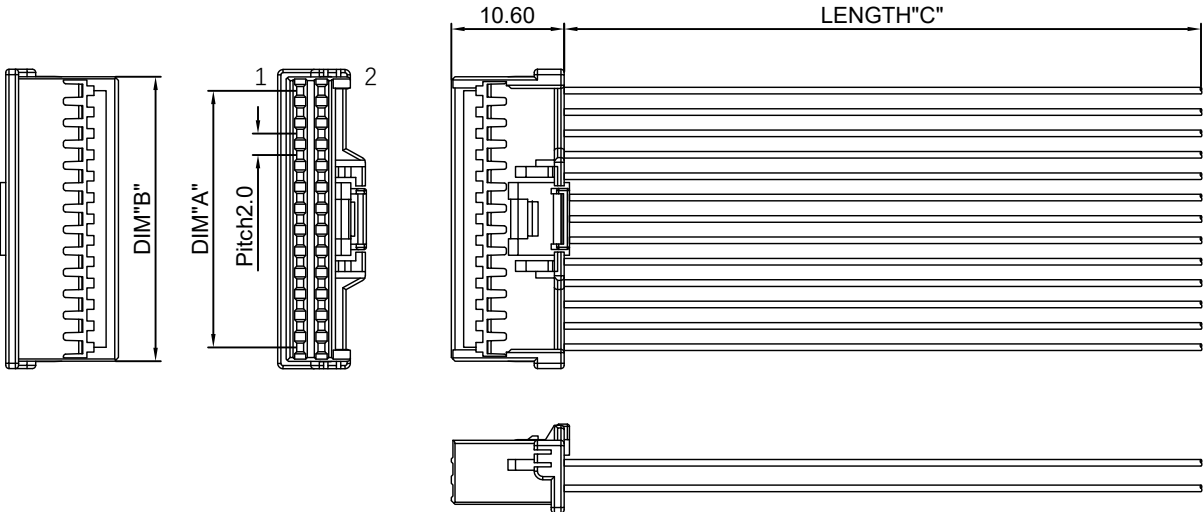

Circuits	Dimensions	
	A	B
2*5P	8.00	10.60
2*6P	10.00	12.60
2*7P	12.00	14.60
2*8P	14.00	16.60
2*9P	16.00	18.60
2*10P	18.00	20.60
2*11P	20.00	22.60
2*12P	22.00	24.60
2*13P	24.00	26.60
2*14P	26.00	28.60
2*15P	28.00	30.60
2*16P	30.00	32.60
2*17P	32.00	34.60
2*18P	34.00	36.60
2*19P	36.00	38.60
2*20P	38.00	40.60

Specifications :

Voltage rating: 250V AC / DC.

Current rating: 3A AC / DC.

Withstanding voltage: 1000V AC/minute.


Temperature range: - 40°C ~ + 105°C.

Insulation resistance: ≥ 1000MΩ.

Contact resistance: ≤ 20mΩ.

Matching contact: 5016471000.

Applicable wires(AWG or mm²): 22AWG ~ 28AWG.



UNMARKED TOLERANCES		TITLE		2009		KIMKEE.LTD		www.kimkee.cn	
DIMENSIONS	TOLERANCE	Pitch2.0mm DOUBLE ROW HOUSING WIRING HARNESS							
x	±0.5	CUSTOMER		-		CUSTOMER PART NO.		-	
x.x	±0.25	DRAWN BY		CINDY.LI		PART NUMBER		501646-xx00	
x.xx	±0.15	CHECKED BY		CLARA.TANG		DRAWING NUMBER		mx501646	
0 to 500	+15 / -0	APPROVED BY		HUAHUA.HE		SCALE FREE		ALL DIMENSION UNIT IN MM	
> 501	+3W/-0 of length							SHEET 1 OF 1	
ANGLES									
x°	±1°								