


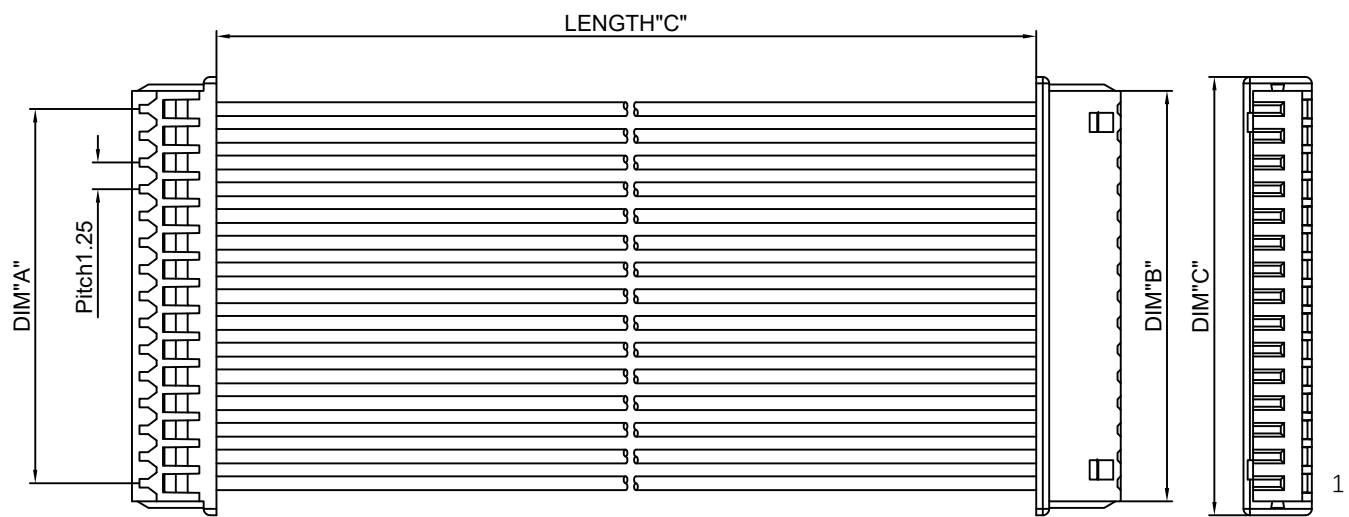

Circuits	Dimensions		
	A	B	C
02P	1.25	2.95	4.25
03P	2.50	4.20	5.50
04P	3.75	5.45	6.75
05P	5.00	6.70	8.00
06P	6.25	7.95	9.25
07P	7.50	9.20	10.50
08P	8.75	10.45	11.75
09P	10.00	11.70	13.00
10P	11.25	12.95	14.25
11P	12.50	14.20	15.50
12P	13.75	15.45	16.75
13P	15.00	16.70	18.00
14P	16.25	17.95	19.25
15P	17.50	19.20	20.50
16P	18.75	20.45	21.75

Specifications :

Voltage rating: 125V AC / DC.

Current rating: 1.0A AC / DC.

Withstanding voltage: 250V AC/minute.

Temperature range: - 25°C ~ + 85°C.

Insulation resistance: ≥ 100MΩ.

Contact resistance: ≤ 20mΩ MAX.

Matching contact: 500798000 / 500588000.

Applicable wires(AWG or mm²): 26AWG ~ 32AWG.

UNMARKED TOLERANCES		TITLE		2009			
DIMENSIONS	TOLERANCE	PITCH1.25mm WIRING HARNESS HOUSING SINGLE ROW					
x	±0.5	CUSTOMER	-	CUSTOMER PART NO.	-		F
x.x	±0.25	DRAWN BY	CINDY.LI	PART NUMBER	mx51021		
x.xx	±0.15	CHECKED BY	CLARA.TANG	DRAWING NUMBER	mx51021	A3	A
0 to 500	+15 / -0	APPROVED BY	HUAHUA.HE	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	
> 501	+3W/-0 of length						
ANGLES							
x°	±1°						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION