
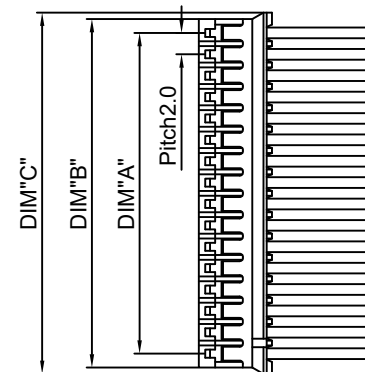


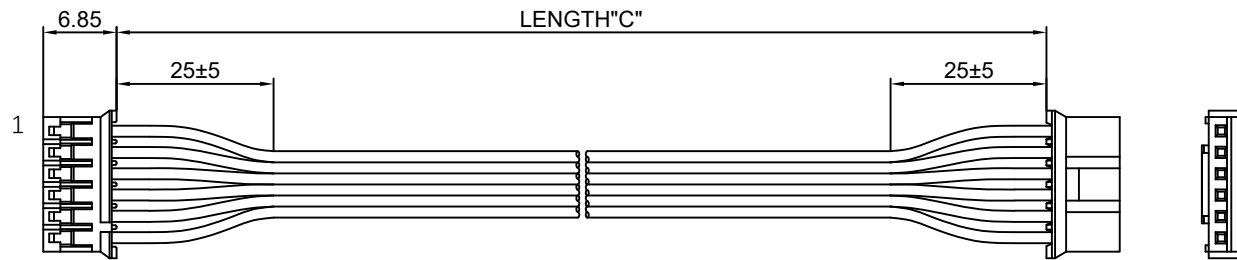

Specifications :

Voltage rating: 100V AC / DC.

Current rating: 2.0A AC / DC.

Withstanding voltage: 1000V AC/minute.

Temperature range: - 25°C ~ + 85°C.

Insulation resistance: ≥ 1000MΩ.

Contact resistance: 10mΩ MAX.

Matching contact: SPH-002T-P0.5.

Applicable wires(AWG or mm²): 24AWG ~ 30AWG.

Circuits	Dimensions		
	A	B	C
02P	2.00	4.60	5.80
03P	4.00	6.60	7.80
04P	6.00	8.60	9.80
05P	8.00	10.60	11.80
06P	10.00	12.60	13.80
07P	12.00	14.60	15.80
08P	14.00	16.60	17.80
09P	16.00	18.60	19.80
10P	18.00	20.60	21.80
11P	20.00	22.60	23.80
12P	22.00	24.60	25.80
13P	24.00	26.60	27.80
14P	26.00	28.60	29.80
15P	28.00	30.60	31.80
16P	30.00	32.60	33.80
17P	32.00	34.60	35.80
18P	34.00	36.60	37.80
19P	36.00	38.60	39.80
20P	38.00	40.60	41.80



UNMARKED TOLERANCES		TITLE		2009		www.kimkee.cn	
DIMENSIONS	TOLERANCE	PITCH2.0mm WIRING HARNESS		Housing SINGLE ROW		QR CODE	
x	±0.5	CUSTOMER		CUSTOMER PART NO.		SIZE	
x.x	±0.25	DRAWN BY		PART NUMBER		REV	
x.xx	±0.15	CHECKED BY		DRAWING NUMBER		A3	
0 to 500	+15 / -0	APPROVED BY		SCALE FREE		SHEET 1 OF 1	
> 501	+3W/-0 of length	HUAHUA.HE		ALL DIMENSION UNIT IN MM		A	
ANGLES							
x°	±1°						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION